





GLOBAL EAST ASIA TECHNOLOGY CO.,LIMITED

Product name: SMA Connector Straight pin

Product model: GL-SMAC3

Electrical specifications

Frequency Range(GHz)	11
Impedance(ohm)	50
VSWR	1.10
Test voltage(max)	2500 V
PIM(3 rd order)	≤-160 dBc @ 2 x 20 W
Mating Cycles	≥ 500
Coupling Torque	Max 1.7 Nm
Recommended Coupling Torque	0.7-1.1 Nm
Temperature Range	-55℃--+155℃
Outer Contact	Brass CuSnZn Plating
Center Contact	Brass Ag Plating
Cable Group	N/A
Plating	CuSnZn
Length(mm)	Φ5.3*13.5

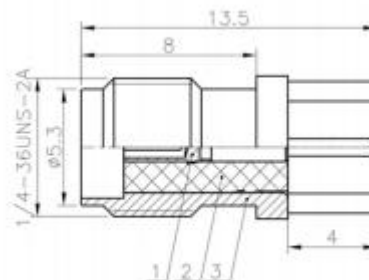

Add: Room 826, Block B,BLDG 18, University Science Park(East), Zhengzhou City,P.R.Henan,China.
Tel: 86-371-60911368 Email:info@global-antenna.com
Web:<http://www.asialeren.com> <http://www.global-antenna.com>